

KBA


11 TN E M
13 TN E M
17 TN E M

 ACCAVALLATI
 OVERLAPPING
 CHEVAUCHÉS
 ÜBERLAPPENDE
 SOBREPUESTOS

	KBA 11 TN E M	KBA 13 TN E M	KBA 17 TN E M	Modello	Model	Modèle	Modell	Modelo		
°C	+5 ÷ -2	+5 ÷ -2	+5 ÷ -2	Campo applicazione	Application field	Champ de l'application	Anwendungsbereich	Campo d'aplicación		
	230V/1/50Hz	230V/1/50Hz	230V/1/50Hz	Alimentazione	Power supply	Alimentation	Netzanschluß	Alimentación		
A	6,6	8,1	7,1	Corrente max. assorbita	Max. absorbed current	Courant absorbé max.	Max. absorbierter Strom	Corriente máx. absorbida		
kW	1,2	1,4	1,3	Potenza max. assorbita	Max. absorbed power	Puissance max. absorbée	Max. aufgenommene Leistung	Máx. potencia absorbida		
	R452A	R452A	R452A	Tipo refrigerante	Refrigerant type	Tipe du gaz	Kältemittel	Tipo refrigerante		
W	1032	1204	1421	Resa *	Capacity *	Puissance *	Leistung *	Rendimiento *		
CMP	CV	0.5	0.75	1	Potenza nominale	Power rating	Puissance nominale	Nennleistung	Potencia nominal	
		E	E	E	Tipo compressore	Compressor type	Type compresseur	Kompressortyp	Tipo compresor	
CND	mm	2.5	2.5	2.5	Passo alette	Fin spacing	Ecart alettes	Lamellenabstand	Paso aletas	
		1 x Ø 254	1 x Ø 254	1 x Ø 254	Ventilatori	Fan	Ventilateur	Ventilator	Ventiladores	
	W	73	73	73	Pot. nom. assorbita	Nom. power cons.	Puiss. nom. absorbée	Nennleistungsaufnahme	Pot. nominal absorbida	
	m³/h	750	750	750	Portata aria	Air volume	Debit d' air	Volumenstrom	Caudal aire	
EVP	mm	4.2	4.2	4.2	Passo alette	Fin spacing	Ecart alettes	Lamellenabstand	Paso aletas	
		HG	HG	HG	Sbrinamento	Defrost	Dégivrage	Abtauung	Descongelación	
		C	C	C	Espansione	Expansion	Expansion	Expansion	Expansión	
		1 x Ø 254	1 x Ø 254	1 x Ø 254	Ventilatori	Fan	Ventilateur	Ventilator	Ventiladores	
	W	73	73	73	Pot. nom. assorbita	Nom. power cons.	Puiss. nom. absorbée	Nennleistungsaufnahme	Pot. nominal absorbida	
		m³/h	700	700	700	Portata aria	Air volume	Debit d' air	Volumenstrom	Caudal aire
		m	3	3	3	Freccia d' aria	Air throw	Projection d'air	Reichweite	Flecha de aire
	kg	57	57	58	Peso netto	Net Weight	Poids net	Nettogewicht	Peso neto	
	kg	79	79	80	Peso lordo	Gross weight	Poids brut	Bruttogewicht	Peso bruto	
	111102176	111102177	111102178	Codice	Code	Code	Kodex	Código		


* = -10°C / +40°C TN

mm	1020	X
mm	520	Y
mm	925	Z

 Imballi
 Packing
 Emballage
 Verpackung
 Embalajes


C : Capillare / Capillary / Capillaire / Kapillar / Capilar
 CMP : Compressore / Compressor / Compresseur / Kompressorleistung / Compresor
 CND : Condensatore / Condenser / Condenseur / Verflüssiger / Condensador
 E : Ermetico / Hermetic / Hermetique / Vollhermetisch / Hermético
 EVP : Evaporatore / Evaporateur / Evaporateur / Verdampfer / Evaporador
 HG : Gas caldo / Hot gas / Gaz chaud / Heissgas / Gas caliente
 P : Potenza frigorifera / Cooling capacity / Puissances frigorifiques / Kälteleistung
 Potenza frigorifica

S : Semiermetico / Semihermetic / Semi-hermetique / Halbhermetisch / Semihermético
 Ta : Temperatura ambiente / Ambient temperature / Température ambiante
 Umgebungstemperatur / Temperatura ambiente
 Tc : Temperatura cella / Cold room temperature / Température chambre froid
 Kühlraumtemperatur / Temperatura cámara
 V : Volume cella / Coldroom volume / Volume chambre / Kühlzellenvolumen / Volúmen cámara
 VT : Valvola termostatica / Expansion valve / Détendeur thermostatique / Thermostatisches
 Expansionventil / Válvula termostática

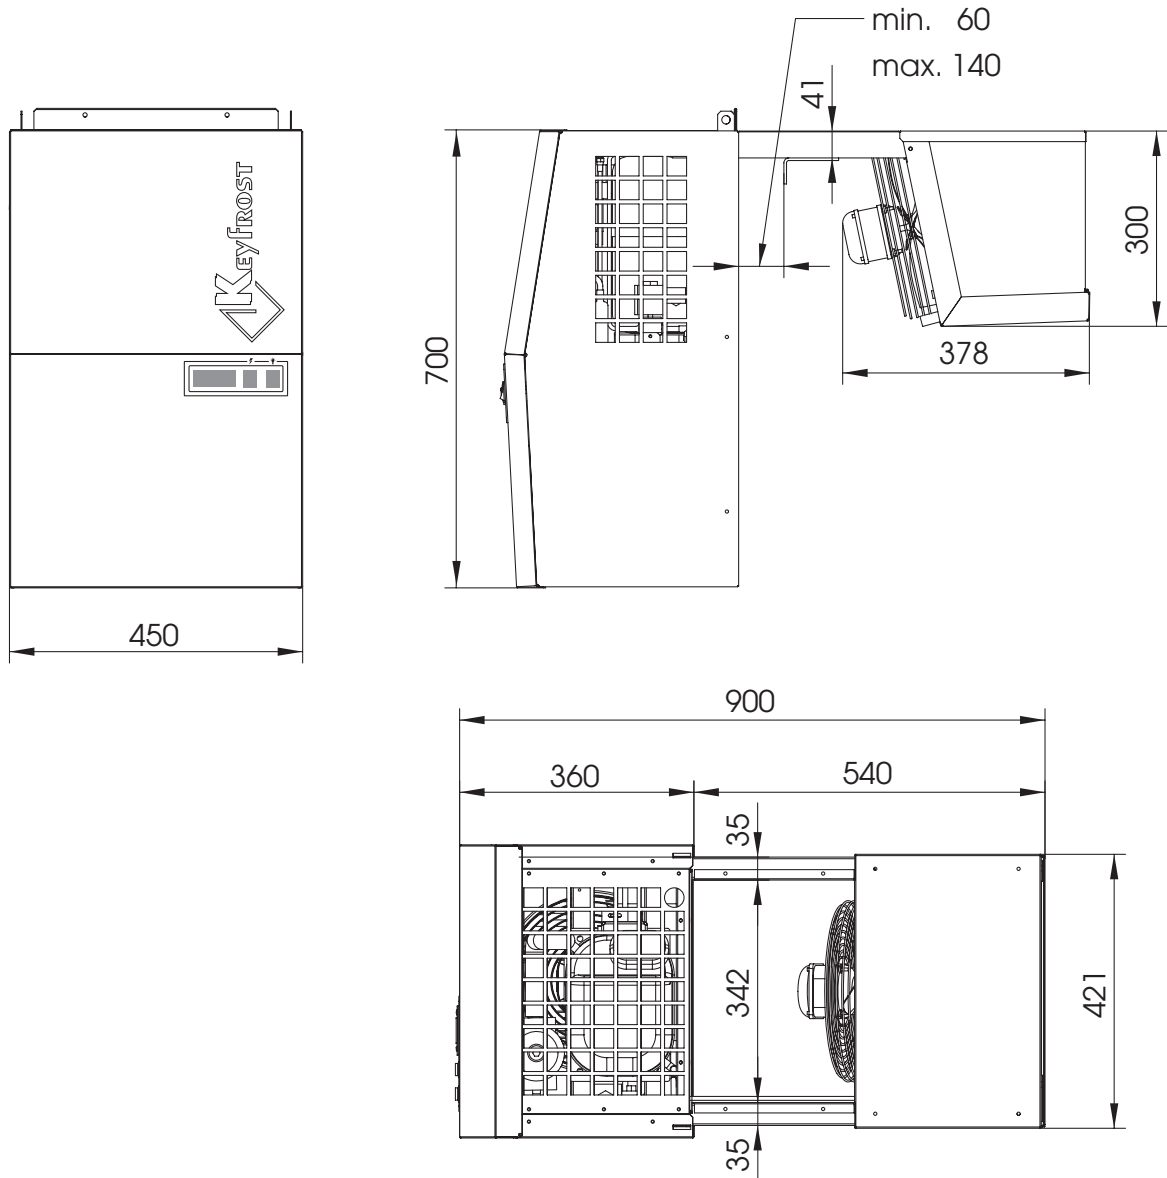

KBA

RESA - CAPACITY - PUISSANCE - LEISTUNG - RENDIMENTO / VOLUME - VOLUME - VOLUME - VOLUMEN - VOLUMEN

	Tc [°C]	-2				0				5			
		Ta [°C]	27	32	38	43	27	32	38	43	27	32	38
KBA 11 TN E M	P [W]	981	915	825	766	1054	983	901	823	1212	1132	1035	947
	V [m3]	5.83	4.61	3.30	2.51	7.36	5.81	4.25	3.11	13.30	10.21	7.24	5.22
KBA 13 TN E M	P [W]	1154	1090	975	895	1237	1149	1073	1006	1434	1364	1294	1242
	V [m3]	7.48	6.03	4.33	3.24	9.45	7.41	5.62	4.33	17.07	13.57	10.30	8.12
KBA 17 TN E M	P [W]	1266	1155	1072	971	1330	1260	1145	1071	1566	1490	1413	1360
	V [m3]	8.62	6.64	5.04	3.72	10.50	8.55	6.23	4.81	19.47	15.53	11.85	9.39

Serie Accavallati - Straddle Serie - Série Cavalier - Rücksackserie - Serie Machilas